

A

ATTORNEY'S DOCKET NO.
064493.0111

PATENT APPLICATION

1

APPLICATION FOR U.S. PATENT UNDER 37 C.F.R. § 1.53(b)
TRANSMITTAL FORM

Box Patent Application
ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application
of:

Inventor or Application Identifier:
Gary L. Rutledge

Entitled: SINGLE CAMERA VIDEO INSPECTION SYSTEM FOR WATER
WELLS AND BORE HOLES

Enclosed are:

☒ Specification (22 Total Pages)
☒ Drawing(s) (7 Total Sheet(s) of ☒ Formal ☐ Informal)
☒ Combined Declaration and Power of Attorney (3 Total Pages)
☒ Newly executed (original or copy)
☐ Copy from a prior application
(for continuation/divisional only)

☒ An Assignment of the invention to Garrut Manufacturing Corporation is attached. A separate cover sheet in compliance with 37 C.F.R. § 3.28 and § 3.31 is included with an Assignment recordal fee of \$40.00 pursuant to 37 C.F.R. § 1.21(h).

☐ Information Disclosure Statement (IDS) PTO-1449
☐ Copies of IDS Citations.

☐ Preliminary Amendment

☒ Certificate of Mailing

☒ Return Receipt Postcard

☒ Other This application claims the benefit of U.S. Provisional Application No. 60/076,312, filed February 27, 1998 and U.S. Provisional Application No. 60/089,824, filed June 19, 1998.

ATTORNEY'S DOCKET NO.
064493.0111

PATENT APPLICATION

2

Applicant is:

☐ Large Entity

☒ Small Entity

☒ Small Entity Statement enclosed

☐ Small Entity Statement filed in prior application.

Status still proper and desired.

The accompanying application is:

☒ Original

☐ Continuation ☐ Divisional ☐ Continuation-In-Part (CIP)
of prior application No. _____ which is hereby
incorporated by reference therein.

FEE CALCULATION					FEE
			Number Extra	Rate	Basic Fee
	Number				\$ 380.00
Total Claims:	33	-20 =	13	X \$9 =	\$ 117.00
Independent Claims	4	- 3 =	1	X \$39 =	\$ 39.00
TOTAL FILING FEE =					\$ 536.00

☒ Enclosed is a check in the amount of \$536.00 to satisfy filing fee requirements under 37 C.F.R. § 1.16. Please charge any additional fees or credit any overpayment to Deposit Account No. 02-0384 of BAKER & BOTTS, L.L.P. A duplicate copy of this sheet is enclosed.

Respectfully submitted,
BAKER & BOTTS, L.L.P.
Attorneys for Applicant



Alexander B. Ching
Reg. No. 41,669
February 26, 1999

Correspondence Address:
Alexander B. Ching, Esq.
Baker & Botts, L.L.P.
2001 Ross Avenue
Dallas, Texas 75201-2980
(214) 953-6402

Applicant or Patentee: Gary L. Rutledge

Attorney's Docket: 064493.0111

Serial or Patent No. _____

Filed or Issued: February 26, 1999

Title: SINGLE CAMERA VIDEO INSPECTION SYSTEM FOR WATER WELLS
AND BORE HOLES

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c)) -- SMALL BUSINESS CONCERN**

I hereby declare that I am an official of the small business concern empowered to act on behalf of the concern identified below:

Name of Small Business Concern: Garrut Manufacturing Corporation
Address of Small Business Concern: 305 Spring Creek Village, Suite 524
Dallas, Texas 75248

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled SINGLE CAMERA VIDEO INSPECTION SYSTEM FOR WATER WELLS AND BORE HOLES by inventor Gary L. Rutledge, described in the specification filed herewith.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e):

NONE

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or my maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name of Person Signing:

Gary L. Rutledge

Title of Person if other than owner:

Address of Person Signing:

305 Spring Creek Village, Suite 524
Dallas, Texas 75248

Signature:



Date:

2/26/99 ✓

SINGLE CAMERA VIDEO INSPECTION SYSTEM FOR
WATER WELLS AND BORE HOLES

RELATED APPLICATIONS

5 This application claims the benefit of serial number 60/076,312, entitled "VIDEO INSPECTION SYSTEM FOR WATER WELLS AND BORE HOLES", filed provisionally on February 27, 1998 and serial number 60/089,824, entitled "SINGLE CAMERA VIDEO INSPECTION SYSTEM FOR WATER WELLS AND BORE HOLES", filed provisionally on June 19, 1998.

TECHNICAL FIELD OF THE INVENTION

10 This invention relates generally to inspection tools and more particularly to a video inspection system for passages such as water wells and bore holes.

BACKGROUND OF THE INVENTION

5 It is often necessary to inspect passages such as water wells, bore holes, pipes, pipelines, tanks or underground cavities. This might be done in order to pinpoint damaged casings, obstruction, or other conditions that can be repaired. A down hole inspection might also be used to located lost or damaged pumps or tools. By capturing the inspection of a borehole or water well on a video tape, a record of the well's condition can be
10 captured and saved.

In a typical down hole surveying system, the down hole tool has a single camera which allows for downward viewing only. This eliminates the possibility of examining the sides of a wall or a bore hole.

15 One solution to this problem has been to use mirrors in conjunction with a downward camera to capture images of the side of the bore hole. This solution is inadequate because it produces poor image quality, produces an image of reduced size and provides a reversed image.

20 Another solution proposed to address this problem is a two camera system. One such system is disclosed in U.S. Patent No. 5,652,617, entitled "Side Scan Down Hole Tool Having Two Cameras" and issued to Barbour on May 31, 1996.

25 This system includes one camera pointed straight down the bore hole and operable to view down the hole and a second camera mounted to provide a close up of the side of the borehole. One drawback of this system is that an added camera involves added expense, additional complexity and takes-up additional space.
30

SUMMARY OF THE INVENTION

Accordingly, it may be appreciated that a need has arisen for a single camera video inspection tool for water wells, bore holes or other passages. In accordance with the teaching of the present invention, a single camera video inspection tool is provided that substantially eliminates or reduces the disadvantages of previous inspection tools.

In one embodiment, a system for video inspection of a bore hole is provided. The system includes a carrying case having a deep housing and a removable cover with a spool of coaxial cable stored inside the carrying case. The coaxial cable exits the carrying case at an opening. A cable arm attached to the carrying case and supported by an adjustable leg has the coaxial cable pass over it. Attached to the end of the coaxial cable is a camera assembly. The camera assembly includes a single camera operable to capture an image in a first direction along a long axis and a second direction, ninety degrees off set from the first direction.

In another embodiment, a down hole tool for video inspection is provided. The camera includes a first image sensor operable to acquire an image in a first direction along a first axis and a second image sensor operable to acquire an image in a second direction essentially perpendicular to the first direction. Also included is a camera board and processor coupled to the first image sensor and second image sensor operable to receive an image from either the first image sensor or second image sensor and prepare the image for display.

In another embodiment, a down hole tool for video inspection is provided. The tool includes an image sensor in a housing operable to capture an image in a first direction parallel to a first axis. The image sensor is further able to capture an image in a second direction.

The second direction is approximately perpendicular to the first direction. Also included is a camera board and processor coupled to the image sensor and operable to process the image and prepare it for display.

5 The present invention provides various technical advantages over current methods. For example, a single camera can be used to view downward images and side images, reducing the size and bulk of the camera assembly. Also, an inspection tool is provided that can be easily
10 transported. Other technical advantages may be readily apparent to one skilled in the art from the following figures, descriptions and claims.

064493.0111

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention and advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which like numbers represent like parts, in which:

FIGURE 1 illustrates a system for inspecting bore holes and water wells;

FIGURE 2 illustrates a carry case in accordance with the teachings of the present invention;

FIGURE 3 illustrates a control system and monitor in accordance with the teachings of the present invention;

FIGURE 4 illustrates a cable winder in accordance with the teachings of the present invention

FIGURE 5 illustrates a cable arm encoder in accordance with the teachings of the present invention;

FIGURE 6 illustrates a single camera assembly in accordance with the teachings of the present invention;

FIGURE 7 illustrates a two camera system in accordance with the teachings of the present invention;

FIGURES 8A, 8B, and 8C illustrate a one camera system in accordance with the teachings of the present invention;

FIGURE 9 illustrates a close-up view of the lower section of the one camera system in accordance with the teachings of the present invention; and,

FIGURE 10 illustrates a single camera system having multiple image sensors in accordance with the teachings of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Embodiments of the present invention and its advantages are best understood by referring to FIGURES 1 through 10 of the drawings, like numerals being used for like and corresponding parts of the various drawings.

FIGURE 1 illustrates a system for using a video inspection system in accordance with the teachings of the present invention. System 10 includes a carrying case 1 which includes a deep housing 12 and a removable cover 14. Carrying case 1 also includes a spool 16 of coaxial cable 18. Coaxial cable 18 is fed through carrying case 1 and over a cable arm 20 which is supported by an adjustable leg 22. The end of coaxial cable 18 is attached to down hole camera assembly 24, which will be discussed in detail in conjunction with FIGURES 6 through 10. Coaxial cable 18 can be equipped with a quick disconnect 26. One half of the quick disconnect is mounted to coaxial cable 18 and the other half near the top of camera assembly 24. This allows for quick disconnection of camera assembly 24 from coaxial cable 18, so that other cameras or analytical instruments can be attached to coaxial cable 18 and the remainder of the system without disrupting the seal integrity of camera assembly 24. The system is designed for easy transportation and can be run off a generator or battery. Components in carrying case 1 are designed for easy removal and replacement. Camera assembly 24, in one embodiment, is constructed of stainless steel which is water sealed to at least a depth of 2300 feet at an approximate pressure of 1000 pounds per square inch.

In operation, down hole camera assembly 24 is lowered into a well or bore hole 2 that needs inspecting. Bore hole 2 can be a well water hole, a natural gas or oil well, a hole produced at a construction site, a hole produced when taking a core sample or any other hole in the ground that needs to be investigated. Coaxial cable 18 is fed

from through housing 12 and over cable arm 20 as camera system 24 is lowered. Depth information and video from camera assembly 24 are displayed on a monitor 5 located in housing 12. Further details on the operation of system 10 are provided in FIGURES 2-10.

The complete system is made up of five subassemblies. The carrying case, which is illustrated in FIGURE 2, the control system and monitor, which is illustrated in FIGURE 3, the cable winder, illustrated in FIGURE 4, the cable arm encoder illustrated in FIGURE 5 and variations of the cameras illustrated in FIGURES 6-10.

FIGURE 2 illustrates the carrying case 1 in accordance with the teaching of the present invention. Illustrated is a deep housing 12 which contains a spool 16 of coaxial cable 18 as well as electronic equipment that will be discussed in conjunction with FIGURE 3. Attached to deep housing 12 is a removable cover 14 which can close to provide a water-tight seal. Also illustrated is opening 13 which allows coaxial cable 18 to pass from spool 16 to outside carrying case 1. Carry case 1 can be mounted to a pickup truck or van. Alternatively, carrying case 1 can be transported to a site by manual labor.

FIGURE 3 illustrates a control system 9 and monitor 5 in accordance with the teaching of the present invention. Control system 9 includes a monitor 5. Also pictured are a depth gauge 11 which can display the depth of camera assembly 24. Also included are electronics 7 which provides for control of the camera, control of the power supply, control of monitor 5 and control of or regulation of any other electronic system. Monitor control electronics, power supply electronics and camera control electronics are well known to those skilled in the art. The entire unit is mounted on a rail 3 for easy removal. Monitor 5 is operable to display the output of camera assembly 24. It also is operable to display the depth of

camera assembly 24. Additionally, monitor 5 can include an integrated video tape recorder or can attach to an external video tape recorder or similar storage device for recording what is displayed on monitor 5. Monitor 5 can also be
5 attached to a video printer, not pictured, which can provide pictures of the display.

FIGURE 4 illustrates a cable winder in accordance with the teaching of the present invention. Cable winder 13 includes spool 16 of coaxial cable 18. Spool 16 is
10 controlled by a motor 17 which is linked to spool 16 via a chain or belt. As cable is wound or unwound by motor 17 (which is a reversible motor), it passes over level mechanism 19, which maintains an even distribution of coaxial cable 18 over spool 16. Motor 17 controls are
15 mounted on control system 9 and can be lowered and raised by an operator.

FIGURE 5 illustrates a cable arm encoder in accordance with the teaching of the present invention. Illustrated is cable arm 20 which can be supported by adjustable leg 22. Also included is an encoder pulley 23 which is attached to
20 electronic encoder shaft 25. As coaxial cable 18 moves along encoder pulley 23, encoder shaft 25 turns. The number of turns can then be used to determine the amount of cable sent in terms of linear feet or linear meters as is well known to those of skill in the art. The result can be
25 displayed directly onto monitor 5. Also included on cable arm 20 is support pulley 29, which is used to support the cable and camera assembly 24 as it is conveyed along the passage. Encoder shaft 25 could be mounted on to support
30 pulley 29.

FIGURE 6 illustrate a single camera in accordance with the teachings of the present invention. Single camera 30 includes one or more image sensors 32 coupled to a single camera board and processor 34. A single camera may have
35 multiple image sensors 32 but only one camera board and

processor. Image sensors can be charged coupled devices (CCD) sensors, such as the Sony ICX086AK, or can be other types of sensors such as CMOS sensors. In embodiments where single camera 30 includes multiple image sensors 32, a switch is provided to allow switching between image sensors 32. Switch 36 can be any type of electronic switch and can be fiber optic switches as well. Associated with each image sensor 32 are optics 38 which are used to focus the image on image sensor 32. Optics 38 can be of fixed focal length, typically providing a wide angle view, or can be of variable focal length in order to provide a zoom feature. A zoom feature can also be provided electronically, by manipulation of the image captured by image sensor 32.

FIGURE 7 illustrates a double camera embodiment of the present invention. Illustrated in FIGURE 7 is a coaxial cable 18 attached to an upper housing of camera assembly 24. Upper housing 40 of camera assembly 24 includes two camera control boards 42 and 44, along with interface control 46. The interface control 46 ties camera assembly 24 to control system 9 as illustrated in FIGURE 3, through coaxial cable 18. Control boards 42 and 44 and interface control 46 are well known, readily available, off-the-shelf devices as are well known by those of skill in the art. Lower housing 41 of camera assembly 24 includes a down view camera 54 and a side view camera 52. Side view camera 52 is mounted approximately 90 degrees from down view camera 54. Down view camera 54 is operable to view down a long axis of a bore hole or water well while side view camera 52, views along a plane approximately perpendicular to the long axis of the bore hole. Illumination for the cameras is provided by high intensity lights 50 with two located on the side and three located on the lower face of the housing and associated with down camera 54. The lower housing is mounted in such a way that side view camera 52 can be

rotated while downward view camera 54 stays fixed. Side view camera 52 is rotated by means of a stepper motor 48.

Camera assembly 24 is lowered into a well or bore hole by means of coaxial cable 18 stored on a motor driven spool 16 bolted into housing. As coaxial cable 18 is unwound or wound, it threads a level wind mechanism 19 which maintains an even distribution of the cable 18 over the spool 16.

Once camera assembly 24 is lowered into a passage such as a well or bore hole, pipe, tank, pipeline, pit or any other fluid containment system, the video is displayed on the monitor 5 and viewed by the operator at the surface. Typically a user would switch between down view camera 54 and side view camera 52 depending on what view was needed. Side view camera 52 can also be rotated 360 degrees for enhanced viewing. In one embodiment the display of monitor 5 can be split into two or more windows. Part of the display could show the view of down view camera 54 while another part could display the view of side camera 52. One advantage of this arrangement is that when a split screen is used, the down view camera 54 image is fixed while the side view camera 52 can provide a moving image of the condition of the sides of a bore hole or similar structure. An operator can then see down hole problems, make note of the depth or provide a voice-over narration on the tape using a microphone input (not shown) which can be provided as part of the video tape recorder.

FIGURES 8A, 8B, and 8C illustrate a single-camera system with a single image sensor. Camera assembly 24 consists of an upper section 56a and a lower section 56b. Upper section 56a comprises camera control board 34 along with an electronic interface control 61 which ties the camera system to the master control panel as illustrated in FIGURE 3, through the coaxial cable 18. The housing 58, 60 of upper section 56a, in one embodiment is constructed of stainless steel which is water sealed to at least a depth

of 2300 feet at an approximate pressure of 1000 pounds per square inch.

Lower section 56b of camera assembly 24, is comprised of two parts, an upper part 66 coupled to a lower part 68. Upper part 66 and lower part 68 are coupled by a pair of pivot arms 74 and 76, which are rigidly mounted to upper part 66 and lower part 68 by pivot shafts. This connection allows lower part 68 to be suspended and able to rotate 90 degrees from a vertical to a horizontal position.

Upper part 66 is coupled to upper section 56a by a hollow shaft 64 which may be rotated by a stepper motor 62 located in upper section 56a. Coaxial cable 18 and other cables are routed from upper section 56a to lower section 56b via hollow shaft 64.

FIGURES 8B and 8C illustrate lower section 56b of camera 60. As illustrated in FIGURE 8B, lower section 56b contains a high torque dc motor 78 which is connected to a chain and sprocket system 80 as illustrated in FIGURE 8C. Chain and sprocket system 80 are mounted within one of the pivot arms 74. Chain and sprocket system 80 are therefore connecting upper part 66 with lower part 68. Second pivot arm 76 provides a path for routing coaxial cable 56 and other electronic cables from hollow shaft 64 through upper part 66 of lower section 51b to lower part 68 of lower section 51b in order to provide power to a video camera 70, a plurality of lights 72, and pivot switches (not pictured) contained in lower part 68.

Lower part 68 comprises the camera enclosure which contains a single image sensor 70 with a wide-angle lens. Image sensor 70 typically includes a CCD-type image sensor. Lower part 68 also includes three high intensity lights 72, which can be adjusted to provide for a variety of brightness levels. When image sensor 70 is pointed down, lights 72 may be set for a variety of voltages to display a variety of brightness levels. Down position is achieved

when the image sensor is pointing down the bore hole or passage along an axis parallel to the long axis of the bore hole. This is a first position. The second position is ninety degrees off-set from the first position and is the side-view position. When image sensor 70 is rotated to a side-view position, the voltage supplied to lights 72 are automatically switched to a lower setting in order to reduce the brightness caused by reflection off of the wall of the passage, particularly when camera system 60 is used in white PVC casing. When image sensor 70 is in side-view mode, lower part 68 is operable to rotate a full 360 degrees around the first axis to view the side wall of the bore hole or well casing. The rotation is controlled at the control panel as illustrated in earlier figures and allows for image sensor 70 to be started, stopped and reversed to a complete 360 degrees while in a side-view mode. Image sensor 70 can capture an image at any angle between the down position and the side-view position.

FIGURE 9 illustrates a close-up view of lower section 56b of camera system 60. Illustrated in upper section 66 coupled to lower section 68 by pivot arms 74 and 76. Also, illustrated is chain and sprocket system 80 as housed inside pivot arm 74. As mentioned before, chain and sprocket system allows lower section 68 to be moved from a horizontal to a vertical position to allow both down hole view and side viewing.

In operation camera assembly 24 is lowered into a passage such as a well, pipe, pipeline, bore hole, tank, pit or any other fluid containment system. As previously described in conjunction with FIGURE 5, as the cable 18 is lowered, electronic devices 25 measures the linear feed of cable deployed which is recorded in order to indicate depth of camera assembly 24 on the video tape. This allows the depth reading to be shown on a monitor for continuous viewing. The operator of camera assembly 24 can control

the positioning of lower section 68 if the operator wishes to only view straight down the bore hole or other opening, lower section 68 can be set to stay in the down position. However, when the operator wants to view a side view of the bore hole or other opening, a signal can be sent from the operator to lower section 56b and lower part 68 can be rotated 90 degrees to a side view position via a pivoting means 80. Pivoting means 80 may include a chain and sprocket assembly, a belt driven assembly, a direct gear assembly or similar means to pivot lower part 68. Then, the entire lower section 56b may be rotated 360 degrees for viewing all of the side of a bore hole or other opening by use of stepper motor 62 and 64. The 360 degree rotation can be started, stopped, or reversed in any order that the operator needs. The advantage of this system is that only one camera is used and there is no need to switch between a down view camera and a side-view camera.

FIGURE 10 illustrates a single camera with a multiple image sensor down-hole camera in accordance with the teachings of the present invention. Camera assembly 24 has at least one down image sensor 82 operable to capture a view downward along a first axis and one side image sensor 84 operable to capture an image along a plane essentially ninety degrees from down camera 82. Down image sensor 82 and side image sensor 84 are coupled to a single camera board 34, forming a single camera with multiple image sensors. Side image sensor 84 can be mounted in such a way that it can rotate 360 degrees around camera assembly 24. Alternatively, all or part of camera assembly 24 can be made to rotate in such a way that side image sensors 84 can capture an image in a complete 360 degree circle around the inside of a bore hole or well.

Alternatively, a number of side image sensors 84 can be placed around camera assembly 24 in such a way that the entire side of a bore hole can be viewed by simply

switching side view image sensors 84 to view the appropriate sections. Alternatively, camera board and processor 34 can display all of the outputs from side view image sensors 84 together on a display, thus giving an instantaneous three hundred and sixty degree view without rotating camera assembly 24.

While the embodiments discussed in conjunction with FIGURES 1-10 discuss the use of the present invention in bore holes and the like, the present invention can also be used in pipelines and the like that have substantial horizontal runs. In this case, down view would be along a long axis of the pipeline.

Although the present invention has been described in detail, it should be understood that various changes, substitutions and alterations can be made thereto without departing from the spirit and scope of the invention as defined by the appended claims.

WHAT IS CLAIMED IS:

1. A video inspection system comprising:

a first image sensor operable to acquire an image in
a first direction along a first axis;

5 a second image sensor operable to acquire an image in
a second direction essentially perpendicular to the first
direction; and,

10 a camera board and processor coupled to the first
image sensor and second image sensor operable to receive an
image from either the first image sensor or second image
sensor and prepare the image for display.

15 2. The video inspection system of Claim 1, wherein
the second image sensor is an array of image sensors
operable to acquire an image 360 degrees around the first
axis in the second direction.

20 3. The video inspection system of Claim 1, wherein
the camera is mounted in a water tight, pressure sealed
camera assembly for use in a bore hole or water well.

25 4. The video inspection system of Claim 1, wherein
the camera is mounted in a sealed assembly for use in a
pipeline and the first axis is parallel to the long axis of
the pipeline.

30 5. The video inspection system of Claim 3, wherein
the camera assembly transmits images to a monitor via
coaxial cable, the monitor operable to receive the output
of the camera board and processor.

35 6. The video inspection system of Claim 5, wherein
the coaxial cable includes a quick disconnect to allow easy
removal and installation of camera assemblies and other
tools.

7. The video inspection system of claim 5, wherein the coaxial cable is stored on a spool in a transportable case.

5 8. The video inspection system of Claim 5, wherein the coaxial cable passes over a cable arm encoder operable to determine the depth of the camera and display it on the monitor from the output of the camera board and processor.

10 9. The video inspection system of Claim 1, wherein the camera is mounted in a camera assembly operable to rotate about the first axis when the second image sensor is acquiring an image.

15 10. The video inspection system of Claim 1, wherein the first image sensor and second image sensors are a single image sensor, the single image sensor mounted in a rotatable housing, the single image sensor operable to acquire an image in a first direction along a first axis when the rotatable housing is in a first setting, the
20 single image sensor operable to acquire an image zero to ninety degrees offset from the first direction.

25 11. The video inspection system of Claim 10, wherein the rotatable housing is operable to rotate around the first axis, the single image sensor operable to acquire an image as the rotatable housing rotates.

30 12. The video inspection system of Claim 10, wherein the camera is mounted in a water tight, pressure sealed camera assembly for use in a bore hole or water well.

13. The video inspection system of Claim 10, wherein the camera is mounted in a sealed camera assembly for use

in a pipeline and the first axis is parallel to the long axis of the pipeline.

5 14. The video inspection system of Claim 12, wherein the camera assembly is attached to a monitor via coaxial cable, the monitor operable to receive the output of the camera board and processor.

10 15. The video inspection system of Claim 14, wherein the coaxial cable includes a quick disconnect to allow easy removal and installation of camera assemblies and other tools.

15 16. The video inspection system of claim 14, wherein the coaxial cable is stored on a spool in a transportable case.

20 17. The video inspection system of Claim 14, wherein the coaxial cable passes over a cable arm encoder operable to determine the depth of the camera and display it on the monitor with the output of the camera board and processor.

18. A video inspection system comprising:

an image sensor in a housing operable to capture an image in a first direction parallel to a first axis, the image sensor further operable to capture an image in a second direction, the second direction approximately perpendicular to the first directions; and,

a camera board and processor coupled to the image sensor and operable to process the image and prepare it for display.

19. The video inspection system of Claim 18, wherein the housing is rotatable and operable to rotate from a first direction to a second direction and operable to rotate around the first axis when in a second direction, the image sensor operable to capture an image when in a first position, a second position and any position in between.

20. The video inspection system of Claim 18, wherein the image sensor comprises one image sensor operable to capture an image in the first direction and a second image sensor operable to capture an image in a second direction.

21. The video inspection system of Claim 20, wherein the housing is operable to rotate about the first axis such that the second image sensor can capture an image as the housing rotates.

22. The video inspection system of Claim 20, wherein the second image sensor is further comprised of a series of image sensors spaced about the housing and operable to capture an image about the first axis without rotating the housing.

23. The video inspection system of Claim 18, wherein the image sensor is mounted in a water tight, pressure sealed camera assembly for use in a bore hole or water well.

5

24. The video inspection system of Claim 18, wherein the image sensor is mounted in a sealed camera assembly for use in a pipeline and the first axis is parallel to the long axis of the pipeline.

10

25. The video inspection system of Claim 24, wherein the camera assembly is attached to a monitor via coaxial cable, the monitor operable to receive the output of the camera board and processor.

15

26. The video inspection system of Claim 25, wherein the coaxial cable includes a quick disconnect to allow easy removal and installation of camera assemblies and other tools.

20

27. The video inspection system of claim 25, wherein the coaxial cable is stored on a spool in a transportable case.

25

28. The video inspection system of Claim 25, wherein the coaxial cable passes over a cable arm encoder operable to determine the depth of the camera and display it on the monitor with the output of the camera board and processor.

29. A system for video inspection of a passage comprising:

5 a carrying case having a deep housing and a removable cover;

a spool adapted for storing coaxial cable inside the carrying case, the coaxial cable exiting the carrying case at an opening;

10 a cable arm supported by an adjustable leg, the cable arm attached to the carrying case, the cable arm operable to have the coaxial cable pass over it; and,

15 a camera assembly, coupled to the coaxial cable, having a single camera operable to capture an image in a first direction along a long axis and capture an image in a second direction, the second direction ninety degrees offset from the first direction.

20 30. The system of Claim 29, wherein the carrying case further includes a monitor operable to display the image captured by the single camera.

31. The system of Claim 29, wherein the coaxial cable includes a quick disconnect near the camera assembly.

25 32 The system of Claim 29, further including a cable arm encoder operable to measure the length of cable to determine the distance the camera assembly has traveled.

33. A video inspection system comprising:

a camera assembly including:

an upper section having a camera card; and a
stepper motor coupled to the end of the upper section;

5 a lower section, coupled to the upper section and
the stepper motor, operable to rotate about an axis when
the stepper motor is operational, the lower section further
comprising;

an upper part having a high torque dc motor;

10 and


a lower part coupled to the upper part by a
pivoting means, the pivoting means driven by the high
torque motor and operable to pivot the lower part from a
down view to a side view; the lower part further comprising
15 an image sensor coupled to the camera card and operable to
acquire an image in a down position and a side position and
any position in between, the image sensor further operable
to acquire an image as the lower section rotates about an
axis.

20

SINGLE CAMERA VIDEO INSPECTION SYSTEM FOR
WATER WELLS AND BORE HOLES

5 ABSTRACT OF THE DISCLOSURE

 A system (10) for video inspection of a passage such
as a bore hole (2) is provided. The system (10) includes
a carrying case (1) having a deep housing (12) and a
removable cover (14) with a spool (16) of coaxial cable
10 (18) stored inside the carrying case (1). The coaxial
cable (18) exits the carrying case (1) at an opening (13).
A cable arm (20) attached to the carrying case (1) and
supported by an adjustable leg (22) conveys the coaxial
cable (18) to the passage. Attached to the end of the
15 coaxial cable (18) is a camera assembly (24). Camera
assembly (24) includes a single camera operable to capture
an image in a first direction along a long axis and a
second direction, ninety degrees offset from the first
direction.

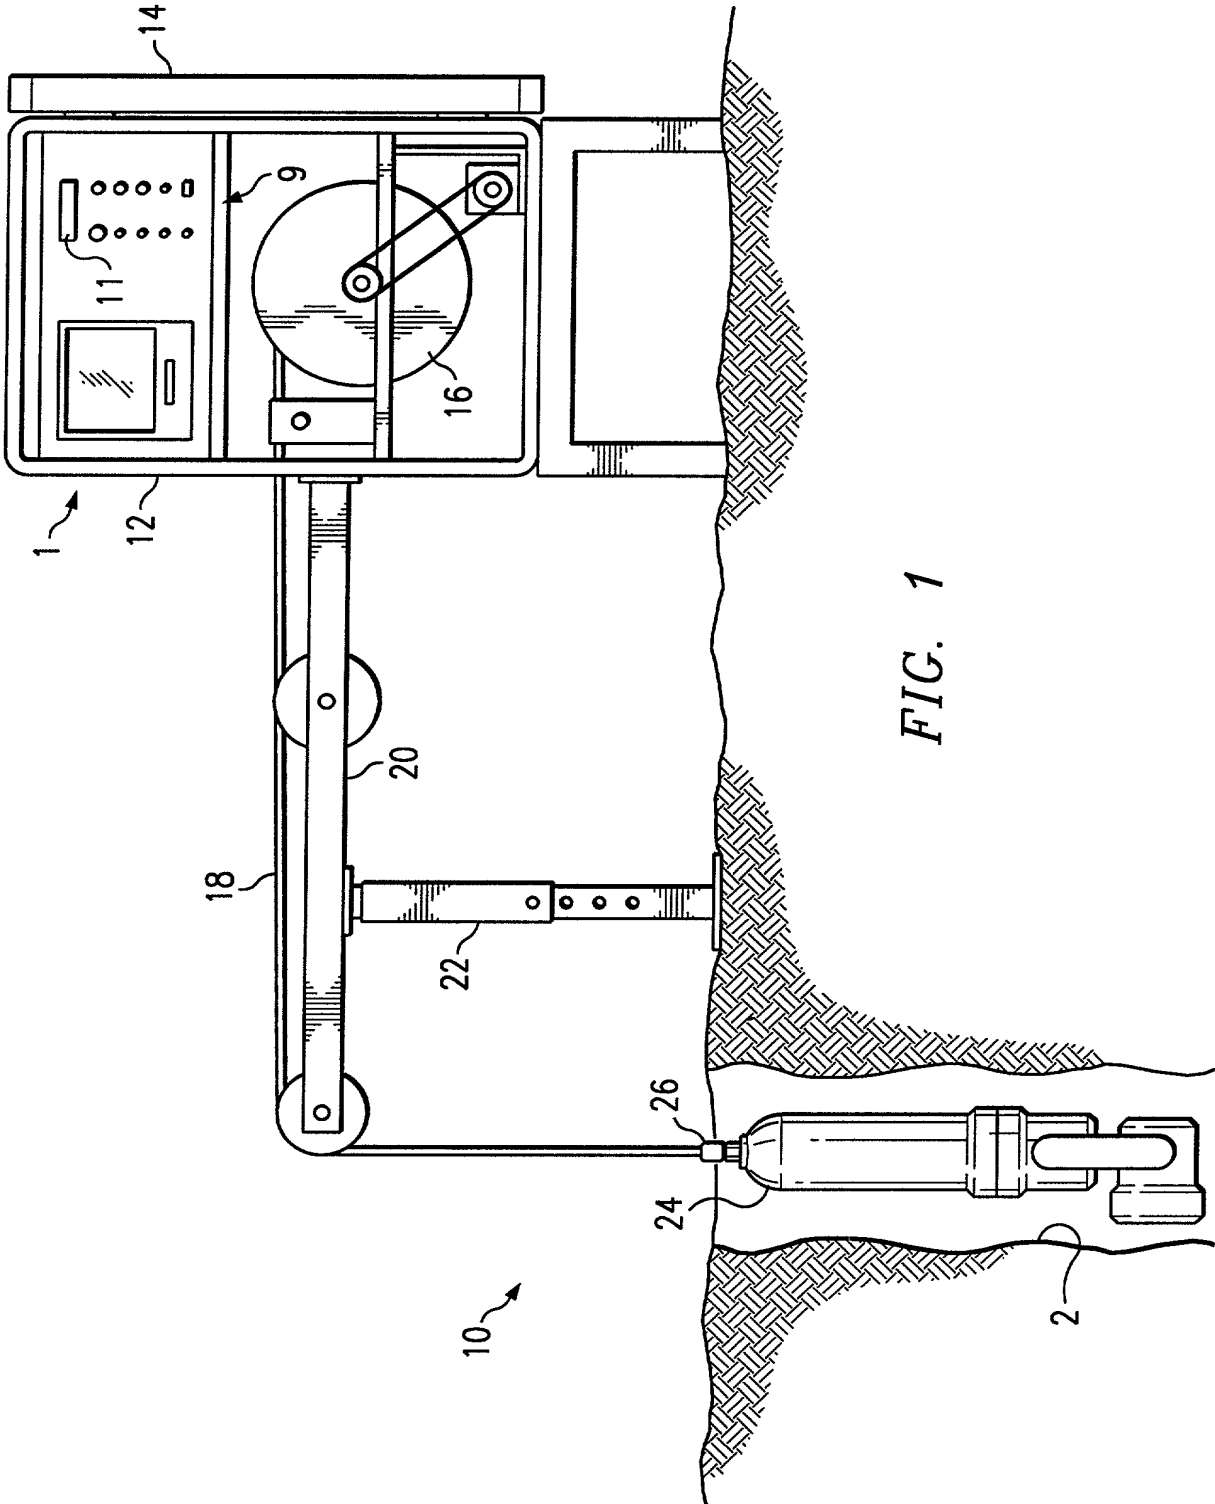

064493.0111

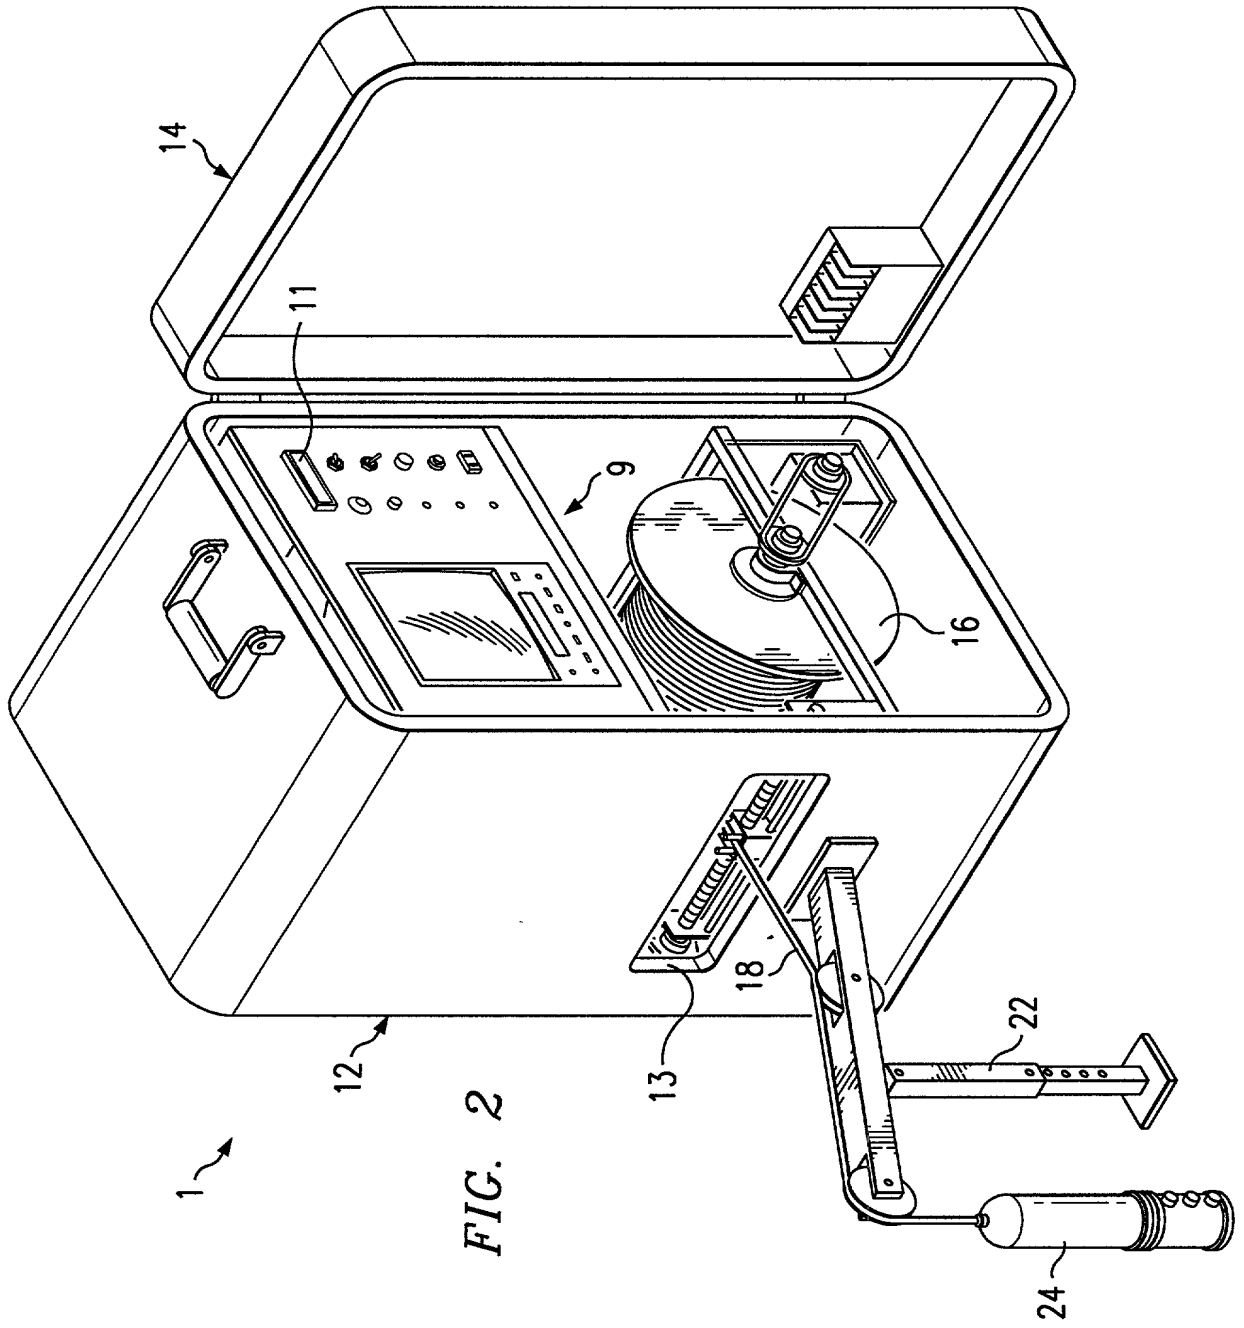


FIG. 3

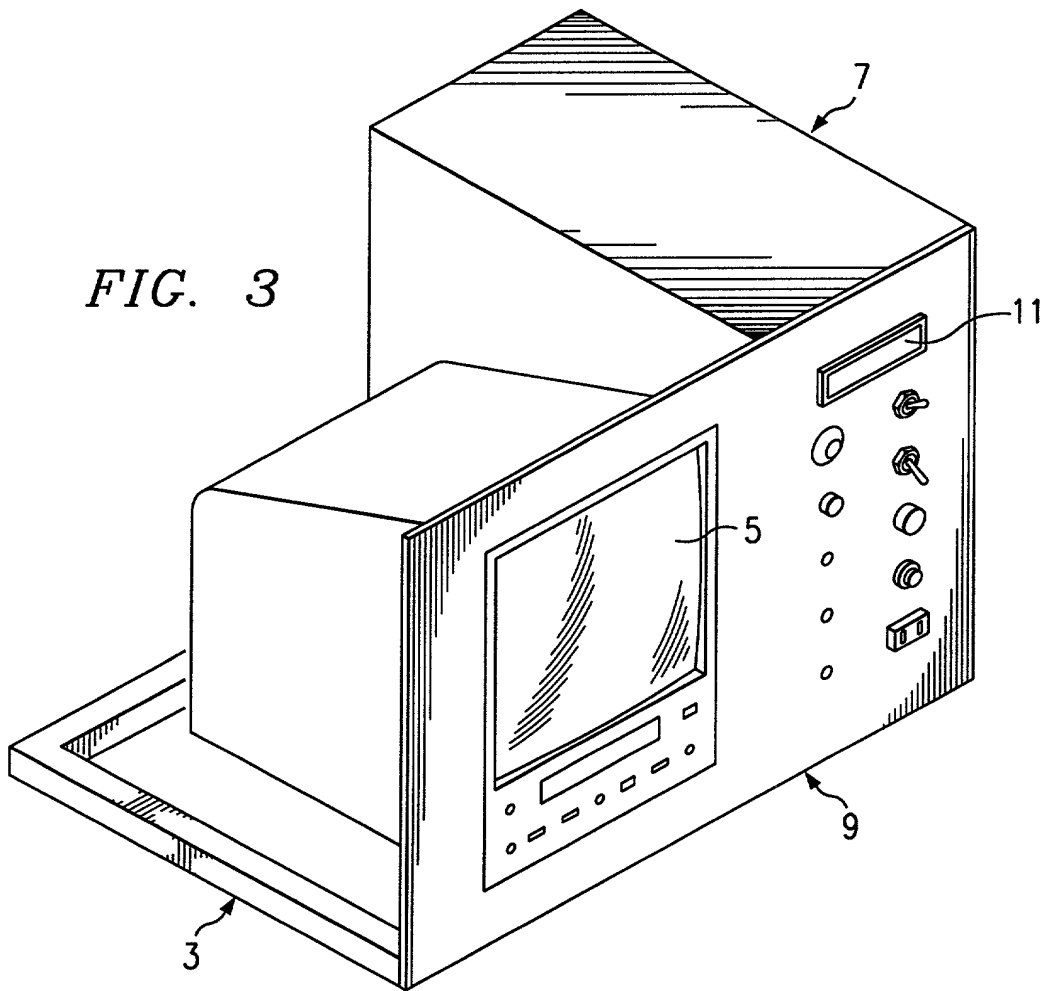


FIG. 4

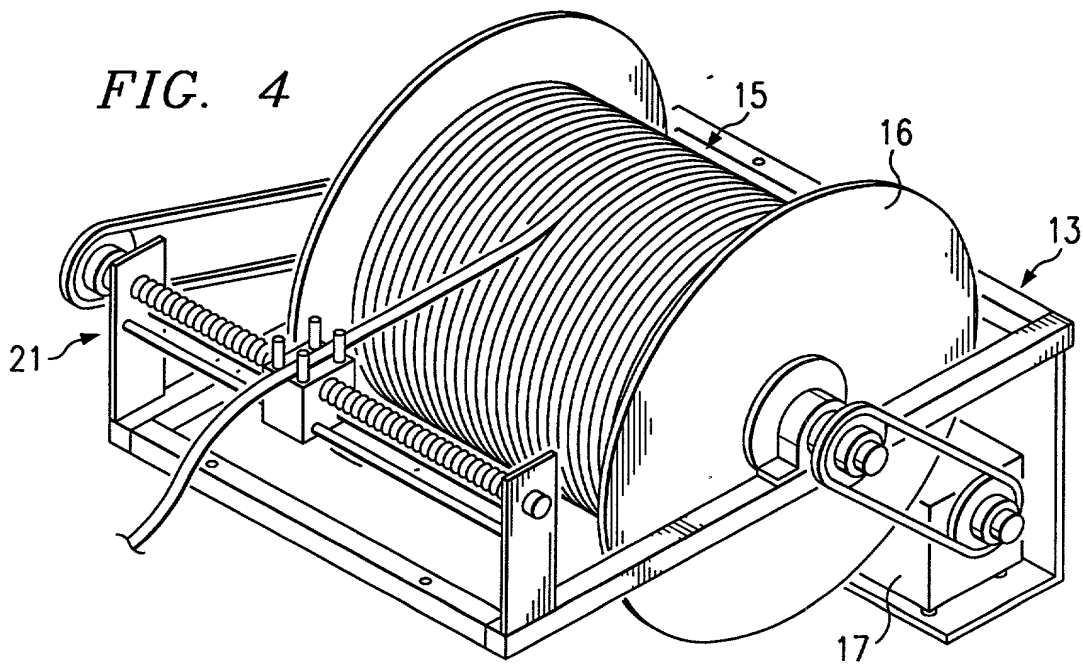
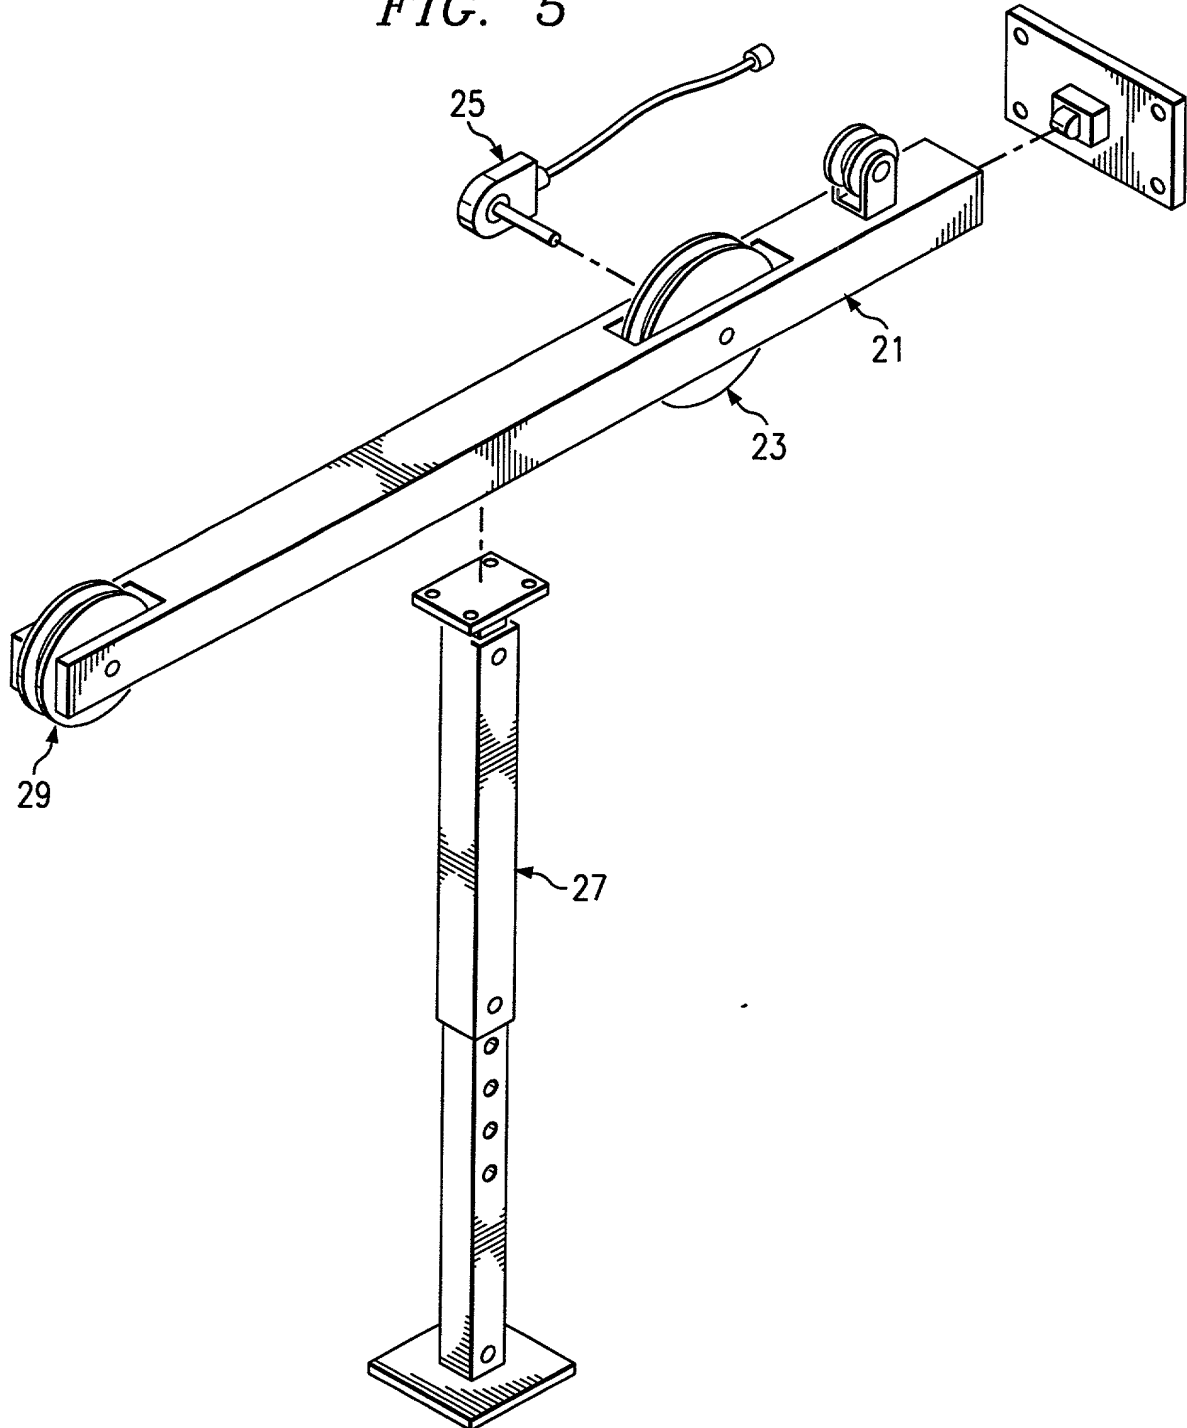


FIG. 5



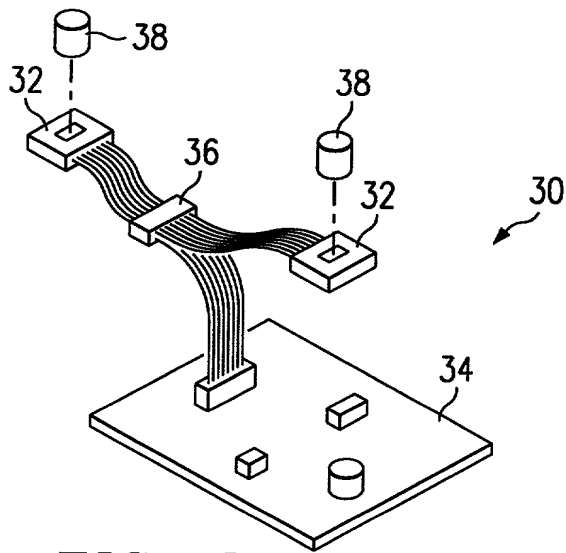


FIG. 6

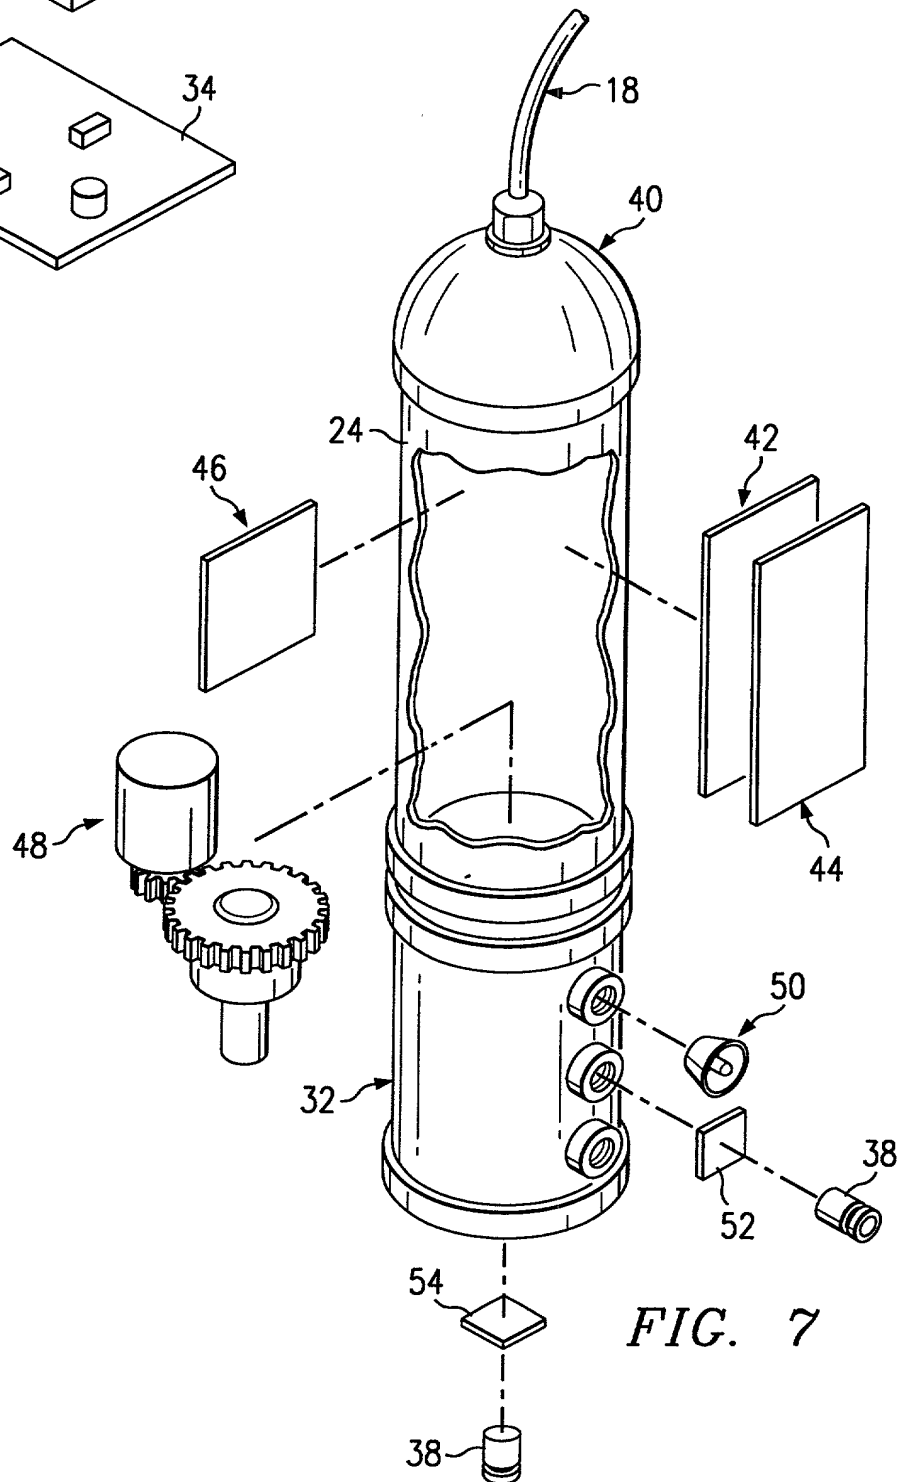


FIG. 7

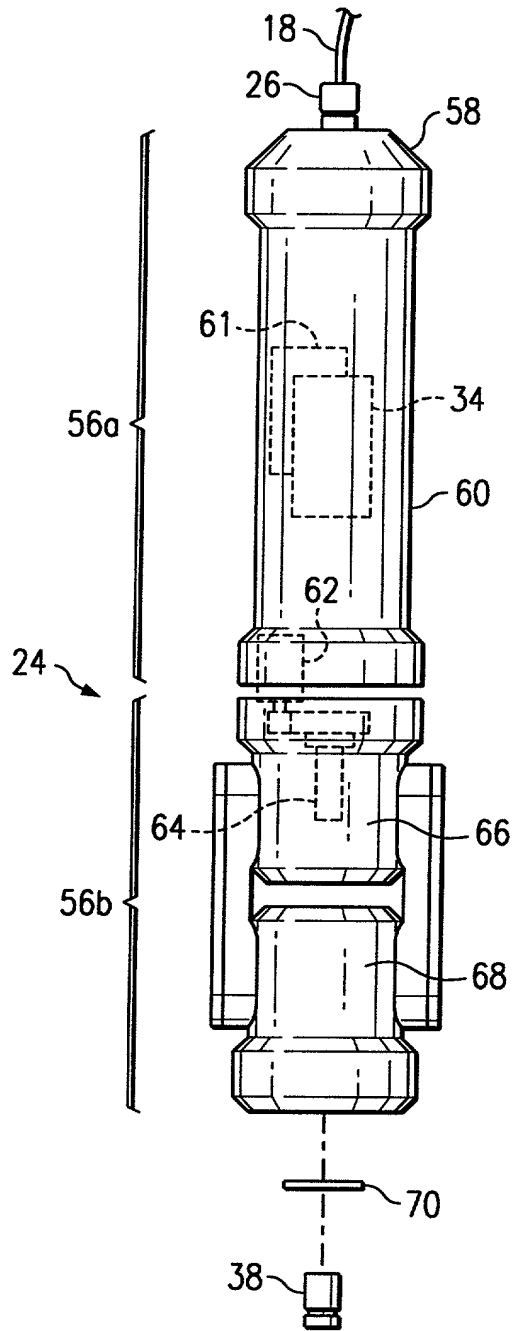


FIG. 8a

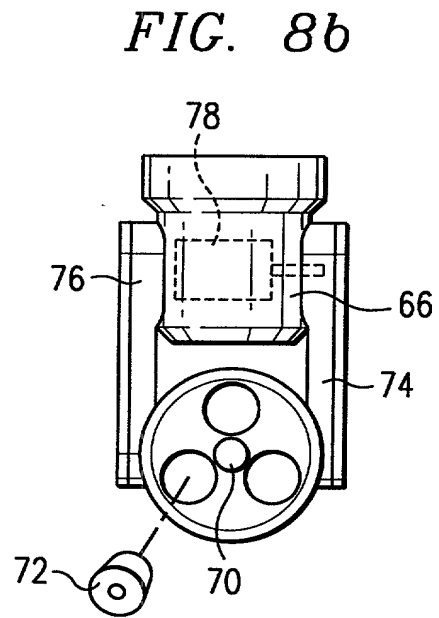
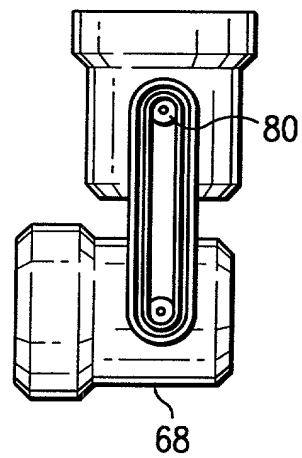


FIG. 8c



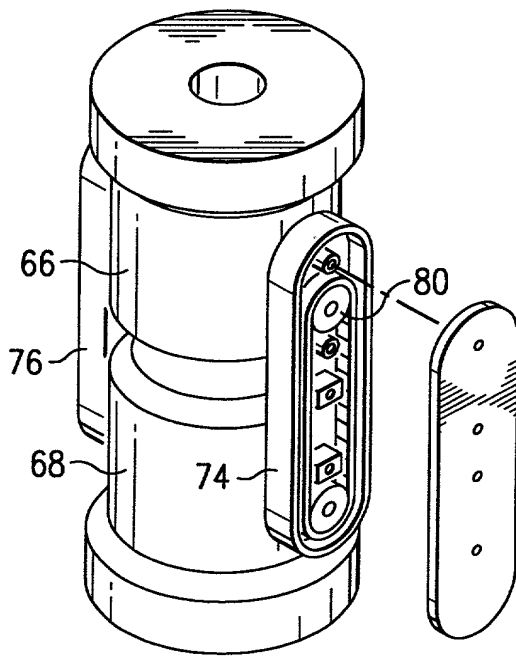


FIG. 9

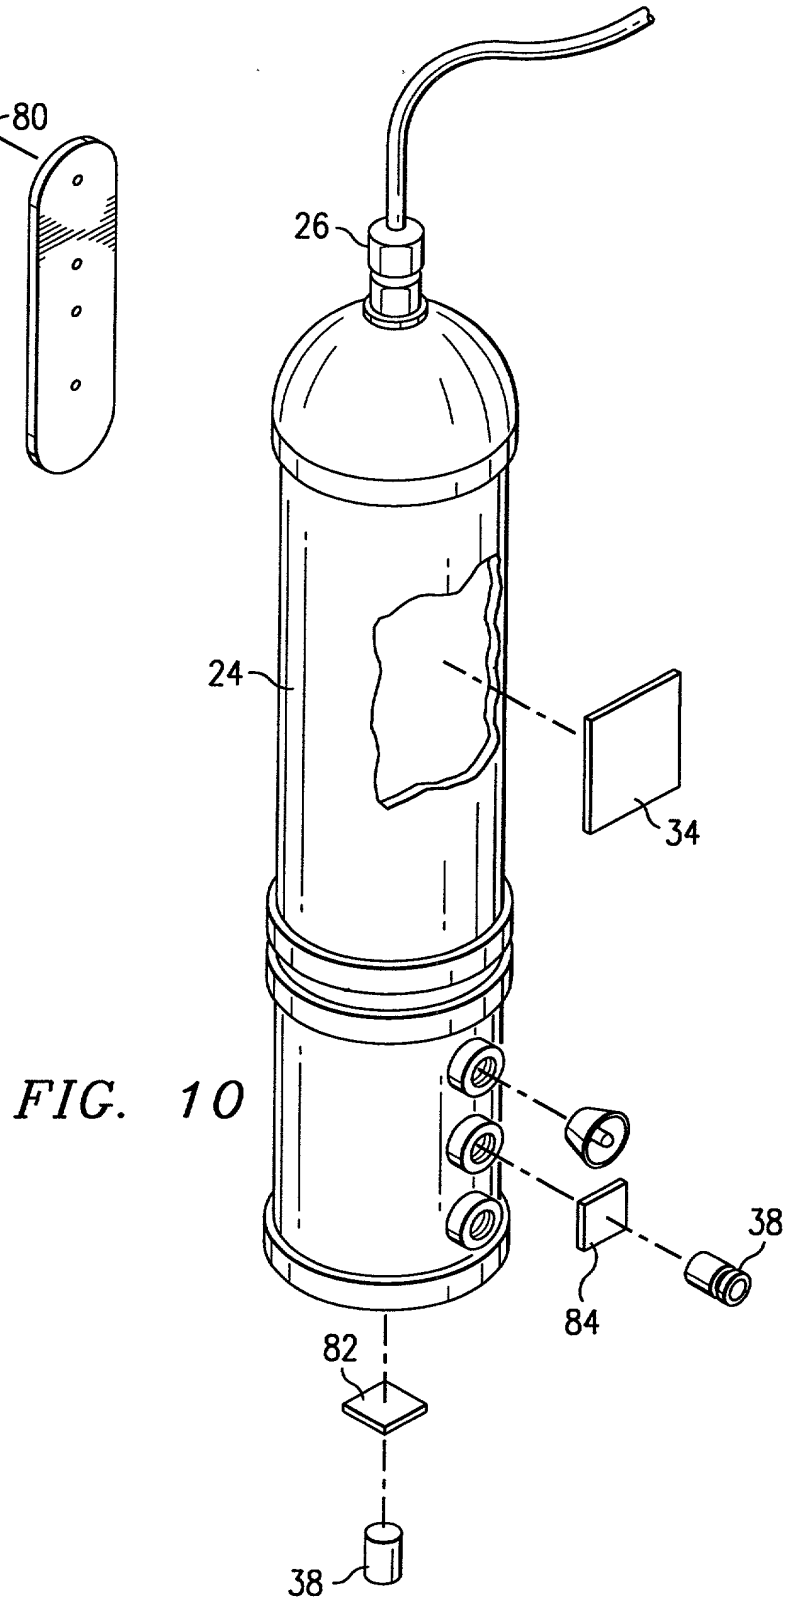


FIG. 10

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; that I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention or design entitled SINGLE CAMERA VIDEO INSPECTION SYSTEM FOR WATER WELLS AND BORE HOLES, the specification of which (check one):

 X is attached hereto; or

 was filed on as Application Serial No.

and was amended on (if applicable);

that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and that I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

60/076,312
(Application No.)

February 27, 1998
(Filing Date)

60/089,824
(Application No.)

June 19, 1998
(Filing Date)

I hereby appoint:

Jerry W. Mills
Robert M. Chiaviello, Jr.
Ann C. Livingston
Thomas R. Felger
Charles S. Fish
Wei Wei Jeang
Kevin J. Meek
T. Murray Smith
Barton E. Showalter
David G. Wille
Bradley P. Williams

Reg. No. 23,005
Reg. No. 32,461
Reg. No. 32,479
Reg. No. 28,842
Reg. No. 35,870
Reg. No. 33,305
Reg. No. 33,738
Reg. No. 30,222
Reg. No. 38,302
Reg. No. 38,363
Reg. No. 40,227

Terry J. Stalford	Reg. No. 39,522
Christopher W. Kennerly	Reg. No. 40,675
Harold E. Meier	Reg. No. 22,428
Alexander B. Ching	Reg. No. 41,669
Douglas M. Kubehl	Reg. No. 41,915
Samir A. Bhavsar	Reg. No. 41,617
Thomas R. Nesbitt, Jr.	Reg. No. 22,075
James J. Maune	Reg. No. 26,946
Roger J. Fulghum	Reg. No. 39,678
Rodger L. Tate	Reg. No. 27,399
Scott F. Partridge	Reg. No. 28,142
James B. Arpin	Reg. No. 33,470
James Remenick	Reg. No. 36,902
Jay B. Johnson	Reg. No. 38,193
Robert W. Holland	Reg. No. 40,020
Floyd B. Chapman	Reg. No. 40,555
Randall W. Mishler	Reg. No. 42,006
Robert A. King	Reg. No. 42,738
James L. Baudino	Reg. No. P43,486
Scott T. Morris	Reg. No. P43,486
Tara D. Knapp	Reg. No. P43,723

all of the firm of Baker & Botts, L.L.P., my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities.

Send Correspondence To:

Baker & Botts, L.L.P.
2001 Ross Avenue
Dallas, Texas 75201-2980

Direct Telephone Calls To:

Alexander B. Ching
at (214) 953-6402
Atty. Docket No. 064493.0111

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

3

Full name of the sole inventor

Gary L. Rutledge

Inventor's signature



Date

2/26/99

Residence (City, County, State)

Parker, Collin County, Texas

Citizenship

United States of America

Post Office Address

3810 Dublin Road
Parker, Texas 75020

064493.0111